

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/088116 A1**

(51) International Patent Classification<sup>7</sup>: **F02N 15/00**

(21) International Application Number:  
PCT/KR2005/000680

(22) International Filing Date: 10 March 2005 (10.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20-2004-0007516 18 March 2004 (18.03.2004) KR

(71) Applicant and

(72) Inventor: LEE, Hyun-Bok [KR/KR]; 893-1 Daechun-  
dong, Dalseo-gu, Daegu 704-801 (KR).

(74) Agent: CHO, Jung-Hwan; 1251, Bisan-7dong, Seo-gu,  
Daegu 703-047 (KR).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,  
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: CASE FOR CAR START MOTOR

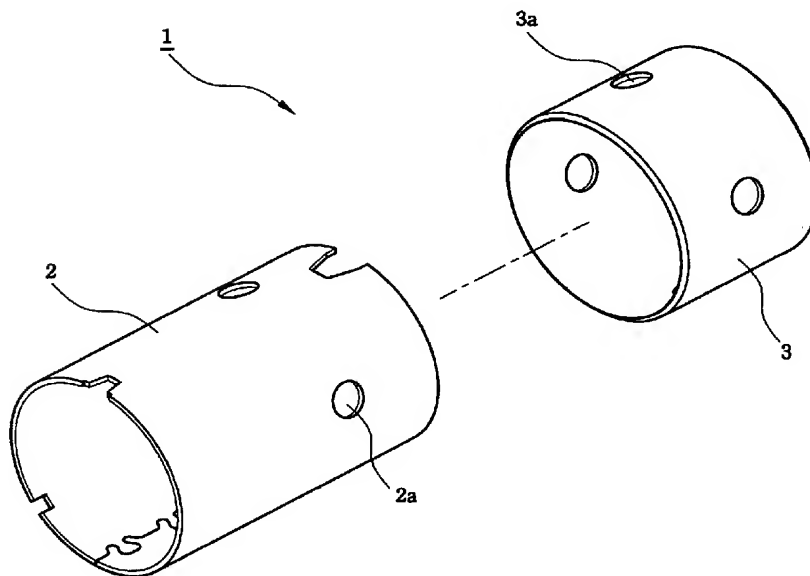

(57) Abstract: Discloses is a case which houses an amateur assembly generating a torque in a car start motor, characterized in that: the case is formed so that it is divided into an inner tube and an outer tube, and the inner tube and the outer tube are firmly coupled to each other by forced fitting and fixed holes of the outer tube are inserted into through holes of the inner tube, thereby keeping a firm coupling state. The case enables it easy to manufacture and can reduce manufacturing time as well as cost since the case for the start motor is manufactured in a separate type.

WO 2005/088116 A1